


Tile Door Data Request Form

Door Size Height _____ mm x Width _____ mm


Door Style

Hinged Tile Door

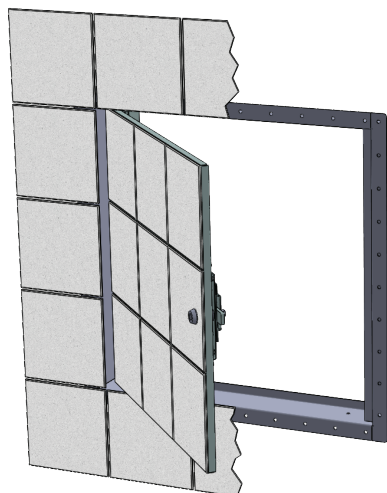

☐ Factory fitted concealed hinge.
Tick for hinged style.


Lift Off Tile Door

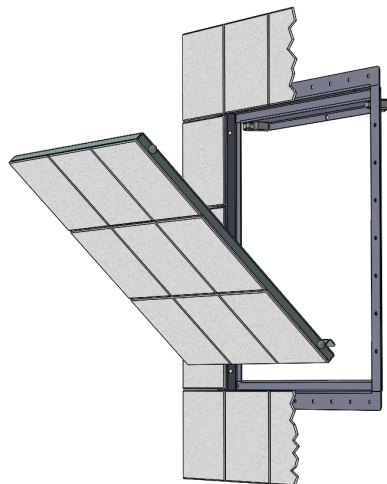

☐ Concealed tabs to allow door removal.
Tick for lift off style.

Tile Information

Please fill in below.

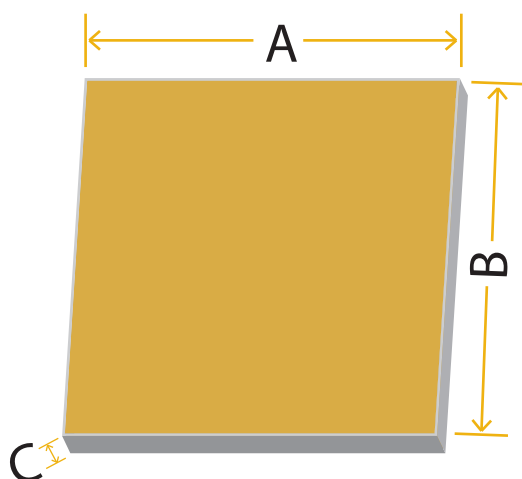

Item	Size (mm)
A (Width)	
B (Height)	
C (Depth)	

Item	Size (mm)
Grout Gap	
Adhesive Bed Depth	
Tile Type	

Lock Type

Please tick the appropriate box.

☐ Touch Catch

☐ 3 Point Lock

☐ Radial Pin Tumbler (RPT) Tamper Proof

Frame Detail

Please tick the appropriate box.

Fully Concealed Frame

No part of the frame or door tray is visible. The best option when you are using whole tiles and looking for a seamless finish.

☐

Exposed Edges of Door Tray only

The best option when the whole tile cannot be used on the door tray, to disguise cut tile edge(s).

☐

Exposed Edges on Wall Side only

The best option when tiles on the adjacent wall have had to be cut to accommodate the panel, to disguise cut tile edge(s).

☐

Exposed Edges to Both Wall Side and Door Tray

Best option when both of the previous situations are applicable.

☐

Finish

Standard tile doors are made from Zintec Mild Steel and Powder Coated White Ral 9010 20% Gloss. Please tick the relevant box if you wish to have your tile door manufactured/ finished differently from the standard.

☐

Standard Zintec Mild Steel and Powder Coated White Ral 9010 20% Gloss

☐

Stainless Steel

☐

Zintec Mild Steel and Powder Coated to own RAL no. Please state below.

☐

Stainless Steel and Powder Coated to own RAL no. Please state below.

Please supply the RAL number of your requested colour here.

RAL

Where the Frame Detail is Exposed please tick the finish required for the Exposed Edge(s).

☐

Powder Coated as above

☐

Powder Coated to match Grout Colour RAL _____

☐

Powder Coated to match Tile Colour RAL _____

☐

Brushed Stainless Steel

Fire Rating

Please tick the appropriate box.

☐

None

☐

60 Minutes

☐

120 Minutes
(only available on Hinged Door Style)

Hinged Tile Doors have a fire rating available up to 120 minutes on doors up to 2175 x 775mm. Lift off tile doors have a fire rating available for 60 minutes on doors up to 300 x 300mm. If you wish to have a fire rating and your requested tile door is larger than the sizes stated above, please note that we will manufacture the tile door to the same specification as the one tested but will not be able to guarantee it's fire rating.

Please Note: Fire rated tile doors are not available with a touch catch.

Please tick this box to confirm you have read and agree to this statement.

☐

Special Instructions

Customer Name: _____

Date: _____

Company Name: _____