




FrameSmart® Liner System for wall lining systems

EW120S

Tested for liner systems up to **150mm deep**

For all brickwork, cast concrete and blockwork rigid wall constructions with face fixed or independent wall lining system

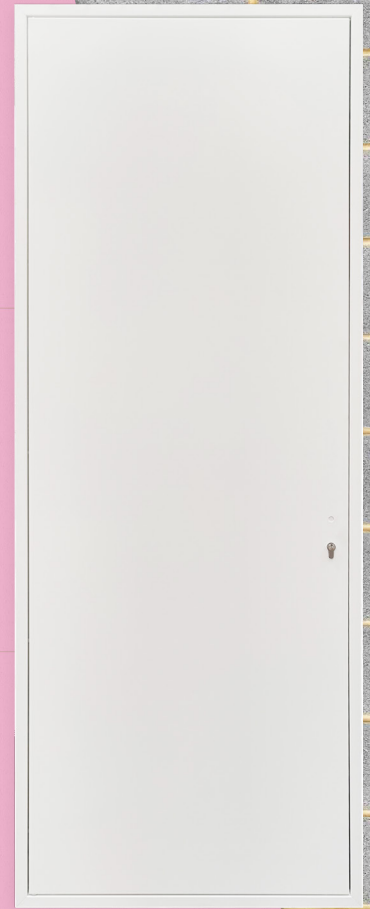


Fire
EW120
EN1634-1

Smoke
'S'
EN1634-3

Acoustic
26-47dB
BSEN10140-2

Air Tight
2.06m³/m/h
EN1634-3

From the inventors of the original metal riser door

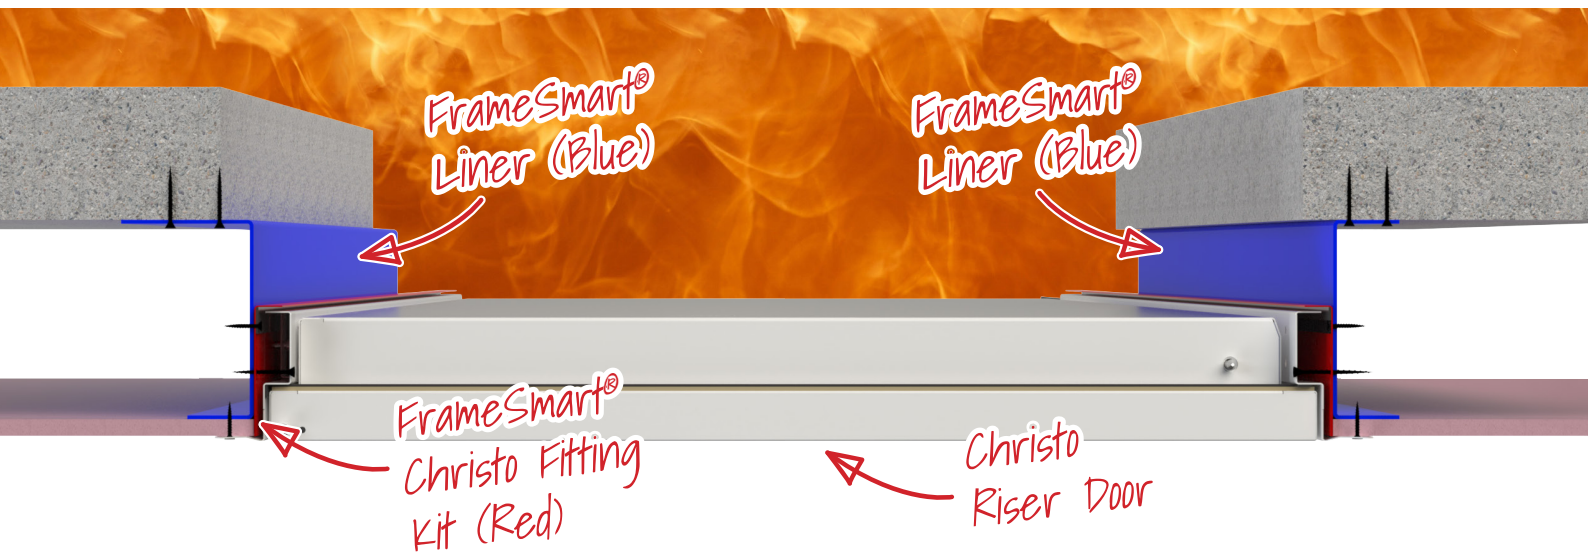


Contact us for a factory tour or to
arrange an on site demonstration

sales@simplis.co.uk

01724 853 090

simplis.co.uk



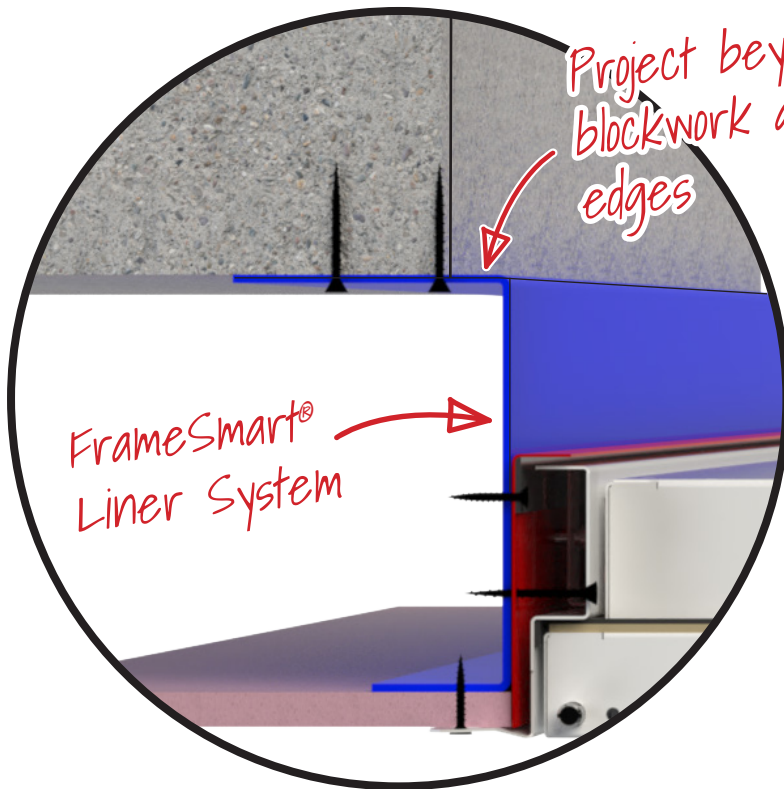

The solution for **Christo Riser Doors** fitted within a wall liner system where the rigid wall construction forms the fire barrier.

FrameSmart® Liner System stops fire spreading into the cavity between rigid walls and a non-fire rated wall lining.

FrameSmart® creates a simple steel aperture liner that works with your wall lining system to provide a fire secure surround to fix the **Christo Riser Door**.

- ✓ Self supporting design
- ✓ Overcomes poor aperture edges without remedial work or repairs
- ✓ Doors can be offset to blockwork apertures to align with room side architectural themes
- ✓ Works with standard Gyplyner style systems or ad-hoc constructions where the internal wall requires building out.



Contact us for a factory tour or to arrange an on site demonstration

sales@simplis.co.uk

01724 853 090

simplis.co.uk

