

Lift Off Tile Door




Key Features

- Fire-rated options available
- Easy-to-use lock mechanism
- No visible frames or cuts
- Maintains grout gaps accurately
- Latched with Radial Pin Tumbler locks or touch catch mechanism
- Manufactured to order for perfect fit
- Simple installation and maintenance

The **Lift Off Tile Door** provides a **high quality opening** for access to building services in **ceramic tiled walls**. Each panel is **made to suit** the individual tile and combination of tiles being used. This ensures **no unsightly tile cuts** or **visible frames** to disrupt the overall tiled finish. With only whole tiles on the door face and **no disrupted joints** the panel position is then very difficult to identify.

In its most discrete form the **very narrow design** utilises the **push catch locks** and an amazing **simple mechanical interconnecting lip** that holds the door tray at the **correct height** to **maintain grout gaps** even when using **heavy tiles**. As with all tile access solutions the panel should be completed first and then tile away from the panel. For the best results it is critical to ensure the correct placement of the door within the tile scheme prior to tilling. The panel comes finished in **powder coated white** as standard with a **factory fitted specialist tile substrate mechanically fitted** into the door tray as a base for the tiles. The door is latched with either **square drive locks** with **sealed chrome barrels** and **security keys** or with a **touch catch mechanism**.

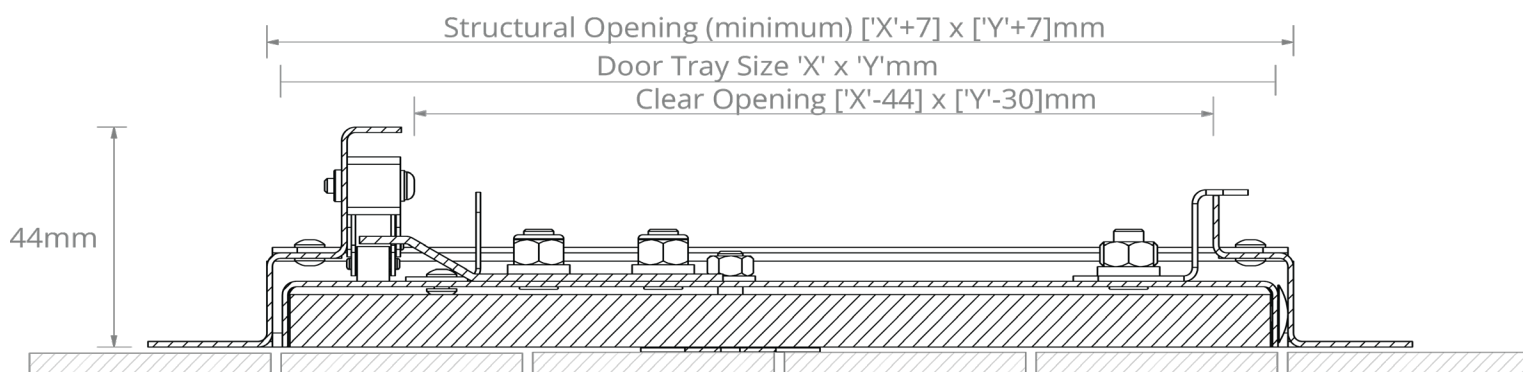

Contact us for a factory tour or to arrange an on site demonstration

sales@simplis.co.uk

01724 853 090

simplis.co.uk





Door Tray & Frame

Formed from **1.0mm** and **1.2mm Zintec electro-galvanised mild steel** with a **25mm** wide frame with pre-punched fixing points finished in **polyester powder coat white (RAL 9010 20% Gloss)** unless specified otherwise.

Hinge & Lock Mechanism

The rear of the frame features a mechanical interconnecting lip for secure fitting. The door tray is equipped with either a **square-drive-operated lock**, riveted to the return fold, **or a touch-catch mechanism**. The touch-catch option does not include a keyhole, making it the **ultimate** discreet option, while the locking option features a chrome-finished radial pin tumbler with a stainless-steel escutcheon plate.

Fire Rating

Certain sizes available with **up to 1 hour** fire rating. Fire testing undertaken independently meeting both **EN and BS standards** in **UKAS approved test laboratories**. Certification available upon request.

Availability

Lift Off Tile Doors are **manufactured to order** to ensure they fit perfectly amongst your other tiles. Please call or email a member of our **Technical Sales Team** for more information.

Fitting

Prepare a **clear trimmed and protected opening** in the structure larger than the frame ordered. Ensure the panel position works with the intended tile scheme.

Screw fix using suitable screws through the **pre-punched holes** to all four sides of the frame at a minimum of **300mm** intervals. When removing and refitting the door take care to avoid any tile damage. Be aware that even small tiled panels can be heavy.

Operation & Maintenance

Either push the door or using the key supplied, engage the key into the lock then open and close while supporting the door. At approximately a **30-degree** opening the door can be lifted out of the frame.

Avoid **abrasive cleaning materials**. Check the operation annually, especially the hinge points and lock, or more frequently if used very regularly. Tighten or oil as required.

Contact us for a factory tour or to arrange an on site demonstration

sales@simplis.co.uk

01724 853 090

simplis.co.uk

