
Simplis® | THE ACCESS PANEL COMPANY LTD

Vinyl-Fit Floor Access Door

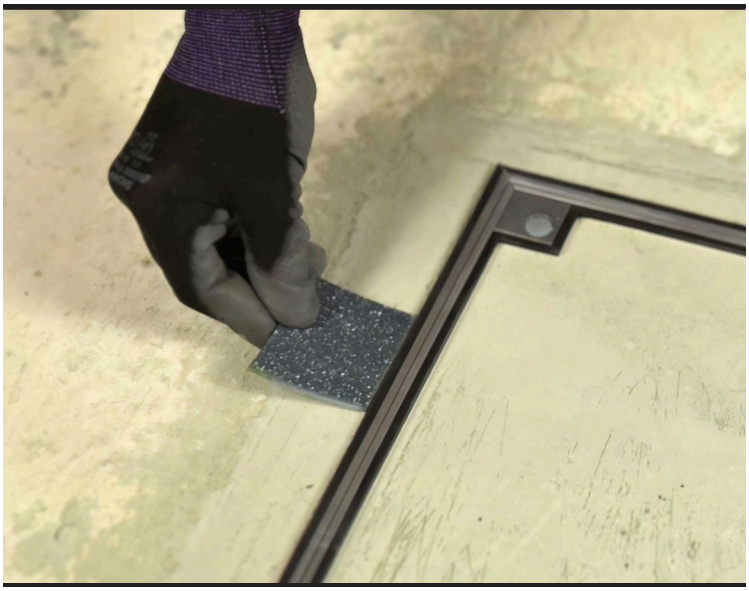


Key Features


- **Elegant 4mm aluminium edges blend discreetly with floor finishes**
- **Easy removal with four corner locking/lifting positions and stainless steel locking bolts and dust-caps as standard**
- **Frame only 50mm deep. Lightweight tray design suitable for floor finishes 2-4mm thick**
- **High performance triple EPDM seals for liquid, odour and dust-tight applications**
- **Reinforced for durability and performance**
- **Two lifting/locking keys and installation manual provided with each access cover**

Simplis® The Access Panel Company's Vinyl-Fit Floor Access Door gives a neat finish and **easy access** to **underlying services** and ducting. It is fitted with **liquid and odour-tight EPDM seals** as standard and is designed for vinyl floor finishes 2 to 4mm thick.

High quality aluminium single recessed floor covers designed for **2-4mm thick flexible vinyl** floor finishes, where a durable **welded sealed joint** is required between the floor finish and access cover. **Integral weldable PVC trim** supplied fitted to the cover and frame ensures **vinyl floor installation** is quick and simple.

Its **50mm frame depth** makes it ideal where **installation depths are restricted**. Suitable for pedestrian, **trolley and light duty car**/van traffic applications. Wide range of **size options available** for **clear openings** of between 200 and 1200mm. All covers fitted with **EPDM liquid**, **odour** and **dust seals** as standard with **four point stainless steel locking**. Load tested to FACTA class AA: vehicles up to 5 tonnes gross laden weight, pneumatic tyres only.

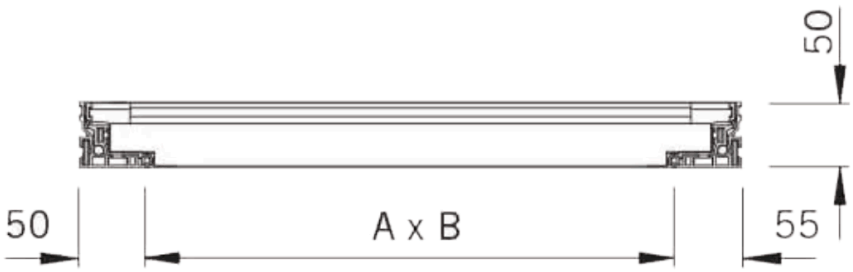

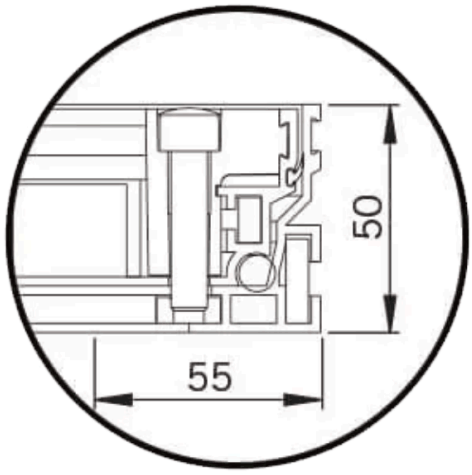

Contact us for a factory tour or to arrange an on-site demonstration

sales@simplis.co.uk **01724 853 090** **simplis.co.uk**

Simplis® | THE ACCESS PANEL COMPANY LTD

Vinyl-Fit Floor Access Door







Benefits

To ensure strength and stability this access cover has an integral weldable PVC trim fitted to the cover and the frame for **2-4mm thick vinyl flooring**. There is a range of standard cover sizes available for clear openings from **200mm** to 1200mm.

Suitable Flooring Types

This floor door is specifically designed to fit **vinyl flooring**. For other floor types, see the **Multi-Fit Floor Access Door**.

Ideal Applications

The **Vinyl-Fit Floor Access Door** is ideal for a range of environments, including **shopping centres**, **offices**, **hospitals**, **schools**, **leisure facilities** and **swimming pools**.

Availability

These panels are available with the standard sizes (as shown below). Bespoke sizes are available. For current lead times and more information, please call or email our **Technical Sales Team**.

Online Support

See website for **fitting guides** and **videos**. **DXF**, **DWG**, **CAD**, **PDF**, **BIM cross-section drawings** and full technical specifications.

Mortar and Concrete Specifications

To enable covers to carry their intended service loads, the following minimum material specifications must be used or exceeded.

Frame bedding mortar-minimum class **M6** to **BS EN 998-2:2016**. Frame haunch and recessed cover structural infill concrete - minimum grade **C35/45** concrete to **BS EN 206:2013** (maximum aggregate size **10mm**). If access covers are to be used in a wet area, waterproofing additives may be required. Fast-curing cementitious mortars or concrete may be used as long as the performance is at least equivalent to those stated above. The concrete specified must not be replaced by screed.

Maintenance

All access covers and frames must be inspected every six months for any damage or wear which may impede their service performance. In order to carry out this inspection the covers must be opened/removed. This aids inspection and also helps keep opening mechanisms in good working order.

During inspection it is recommended that all components are cleaned with a mild detergent and water. All seals and locking screws should be coated and lubricated with a suitable silicone grease. Finally replace any damaged or worn components.

Standard Sizes			
200 x 200	300 x 300	400 x 400	450 x 450
500 x 500	600 x 400	600 x 450	600 x 600
635 x 635	700 x 700	750 x 600	750 x 750
800 x 600	800 x 800	900 x 600	900 x 900
1000 x 600	1000 x 800	1000 x 1000	1200 x 600

Contact us for a factory tour or to arrange an on-site demonstration

sales@simplis.co.uk **01724 853 090** **simplis.co.uk**